# **ABP SERIES**

# **Basic Board Mount Pressure Sensors**

High Accuracy, Compensated/Amplified 60 mbar to 10 bar | 6 kPa to 1 MPa | 1 psi to 150 psi Digital or Analog Output, Liquid Media Capable

#### **DESCRIPTION**

The ABP Series are piezoresistive silicon pressure sensors offering a ratiometric analog or digital output for reading pressure over the specified full scale pressure span and temperature range. They are calibrated and temperature compensated for sensor offset, sensitivity, temperature effects and accuracy errors (which include nonlinearity, repeatability and hysteresis) using an on-board Application Specific Integrated Circuit (ASIC). Calibrated output values for pressure are updated at approximately 1 kHz for analog and 2 kHz for digital. All products are designed and manufactured according to ISO 9001 standards.

- Dry gases option: The input port is limited to non-corrosive, non-ionic media (e.g., dry air, gases) and should not be exposed to condensation. The gases are limited to media compatible with high temperature polyamide, silicone, alumina ceramic, silicon, gold, and glass.
- Liquid media option: Includes an additional silicone-based gel coating to protect the electronics under port P1, which enables use with non-corrosive liquids (e.g. water and saline) and in applications where condensation can occur. Since port P2 is designed for use with non-corrosive liquids, this option is often suitable for wet-wet differential sensing.

#### DIFFERENTIATION

- Enhanced accuracy helps the design engineer fully understand the error in measurement.
- Wide supply voltage range offers design flexibility.
- Power consumption when utilizing sleep mode option allows for use in battery-powered applications.

# **VALUE TO CUSTOMERS**

• Simplifies design-in: Small size saves room on the PC board (PCB), or simplifies design in smaller and lower power devices. Meets Moisture Sensitivity Level 1 requirements, which allows for unlimited shelf life when stored at <30 °C/85 %RH and, under most storage conditions, allows for PCB soldering without any material concern about solder joint quality due

- to aging of the sensor terminals, which minimizes the concern about aging of the terminals prior PCB assembly. Pressure choices allow engineers to select range required for their application. Leadless SMT, SMT, and DIP package options.
- Cost-effective: Small size helps engineers reduce design and manufacturing costs while maintaining enhanced performance and reliability of the systems they design.
- Accurate: Total Error Band (TEB) and wide pressure range enable engineers to optimize system performance by improving resolution and system accuracy. Optional internal diagnostics validate that the sensor readings are correct.
- Flexible: Supply voltage range, variety
  of pressure units, types, and ranges,
  output options, and wide operating
  temperature range simplify use in the
  application.
- Versatile: Wet-media compatibility, sleep mode, and temperature output options make the sensor a versatile choice for Internet of Things applications.
- Honeywell Brand: Utilize proprietary Honeywell technology, and are protected by multiple global patents.
- Food Safety Certification for North America, Europe and Asia.

#### POTENTIAL APPLICATIONS

- Medical: CPAP, blood analysis, blood pressure monitoring, breast pumps, drug dosing, hospital beds, massage machines, oxygen concentrators, patient monitoring, sleep apnea equipment, urine analyzers, ventilators/portable ventilators, and wound therapy
- Industrial: Air brakes, HVAC/ transmitters, life sciences, material handling, pneumatic control and regulation, process gas monitoring, and valve positioning/positioners
- Commercial: Air beds, coffee makers, and washing machines







#### **FEATURES**

- Measures gage and differential pressures
- Total Error Band (see Figure 1):  $\pm 1.5$  %FSS
- Liquid media option: Allows for wet/wet operation on dual ported devices
- Industry-leading long-term stability: ±0.25 %FSS
- Industry-leading accuracy: ±0.25 %FSS BFSL
- Wide pressure range: 60 mbar to 10 bar | 6 kPa to 1 MPa | 1 psi to 150 psi
- As small as 8 mm x 7 mm
- High burst pressures (see Table 7)
- Calibrated over temperature range of 0°C to 50°C [32°F to 122°F]
- Operates from a single power supply of either 3.3 Vdc or 5.0 Vdc
- Output: Ratiometric analog or I<sup>2</sup>C- or SPI-compatible 12-bit digital
- Power consumption: 2 μA typical when utilizing sleep mode option
- Meets IPC/JEDEC J-STD-020D.1
   Moisture Sensitivity Level 1 requirements
- REACH and RoHS compliant
- Options: Internal diagnostic function, liquid media, sleep mode, temperature output
- Sensor materials have been tested and certified for these food safety standards:
  - NSF-169
  - BPA Free
  - LFGB



# **PORTFOLIO**

Honeywell offers a variety of board mount pressure sensors for potential use in medical and industrial applications. To view the entire product portfolio, click here.



#### **FIGURE 1. TOTAL ERROR BAND**

Total Error Band (TEB) is a single specification that includes all possible sources of error. TEB should not be confused with accuracy, which is actually a component of TEB. TEB is the worst error that the sensor could experience. The TEB specification on a datasheet may be confusing. Honeywell uses the TEB specification in its datasheet because it is the most comprehensive measurement of a sensor's true accuracy. Honeywell also provides the accuracy specification in order to provide a common comparison with competitors' literature that does not use the TEB specification. Many competitors do not use TEB—they simply specify the accuracy of their device. Their accuracy specification, however, may exclude certain parameters. On their datasheet, the errors are listed individually. When combined, the total error (or what would be TEB) can be significant.

# All Possible Errors Offset Full Scale Span Pressure Non-Linearity Pressure Hysteresis Pressure Non-Repeatibility Thermal Effect on Offset Thermal Hysteresis Thermal Hysteresis

CHARACTERISTIC	MIN.	MAX.	UNIT
Supply voltage (V <sub>supply</sub> )	-0.3	6.0	Vdc
Voltage on any pin	-0.3	$V_{supply} + 0.3$	V
Digital interface clock frequency: I <sup>2</sup> C SPI	100 50	400 800	kHz
ESD susceptibility (human body model)	2	_	kV
Storage temperature	-40 [-40]	85 [185]	°C [°F]
Soldering time and temperature: lead solder temperature (DIP) peak reflow temperature (Leadless SMT, SMT)		4 s max. at 250°C [482°F] 15 s max. at 250°C [482°F	•

<sup>&</sup>lt;sup>1</sup>Absolute maximum ratings are the extreme limits the device will withstand without damage.

TABLE 2. ENVIRONMENTAL SPECIFICATIONS								
CHARACTERISTIC	PARAMETER							
Humidity: all external surfaces internal surfaces of Liquid Media Option (T, V, B, C, F, G) internal surfaces of Dry Gases Option (N, D)	0 %RH to 95 %RH, non-condensing 0 %RH to 100 %RH, condensing 0 %RH to 95 %RH, non-condensing							
Vibration	15 g, 10 Hz to 2 kHz							
Shock	100 g, 6 ms duration							
Life <sup>1</sup>	1 million pressure cycles minimum							
Solder reflow	J-STD-020-D.1 Moisture Sensitivity Level 1 (unlimited shelf life when stored at $\leq$ 30°C/85 %RH)							
Certification (silicone gel coating option: Port 1 only)	NSF-169, BPA Free, LFGB							

<sup>&</sup>lt;sup>1</sup>Life may vary depending on specific application in which the sensor is used.

TABLE 3. WETTED MATERIALS <sup>1</sup>								
COMPONENT	PRESSURE	PRESSURE PORT 2 (P2)						
	DRY GAS OPTION	LIQUID MEDIA OPTION	PRESSURE PORT 2 (P2)					
Ports and covers		high temperature polyamide						
Metal gel ring	_	_						
Substrate	alumina ceramic	_	alumina ceramic					
Adhesives	epoxy, silicone	epoxy, silicone gel	epoxy, silicone					
Electronic components	silicon, glass, gold, aluminum	_	silicon					

 $<sup>^{1}\</sup>mbox{Contact}$  Honeywell Customer Service for detailed material information.

TABLE 4. SENSOR PRESSURE TYPES							
PRESSURE TYPE	DESCRIPTION						
Gage	Output is proportional to the difference between applied pressure and atmospheric (ambient) pressure.						
Differential	Output is proportional to the difference between the pressures applied to each port (Port $1-Port\ 2$ ).						

CHARACTERISTIC		ANALOG		DIGITAL			
CHARACTERISTIC	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	UNIT
Supply voltage (V <sub>supply</sub> ): <sup>1,2,3</sup> 3.3 Vdc 5.0 Vdc	3.0 4.75	3.3 5.0	3.6 5.25	3.0 4.75	3.3 5.0	3.6 5.25	Vdc
Supply current: 3.3 Vdc 5.0 Vdc sleep mode option	_ _ _	2.1 2.7 —	2.8 3.8 —	_ _ _	3.1 3.7 1	3.9 4.6 10	mA mA μA
Operating temperature range <sup>4</sup>	-40 [-40]	_	85 [185]	-40 [-40]	_	85 [185]	°C [°F]
Compensated temperature range <sup>5</sup>	0 [-32]	_	50 [122]	0 [-32]	_	50 [122]	°C [°F]
Temperature output option <sup>6</sup>	_	_	_	_	±4	_	°C
Startup time (power up to data ready)	_	_	5	_	_	3	ms
Response time	_	1	_	_	0.46	_	ms
Clipping limit: upper lower	_ 2.5	_ _	97.5 —		_ _		%Vsupply
I <sup>2</sup> C/SPI voltage level: low high	_ _	_ _	_ _	_ 80	_ _	20 –	%Vsupply
Pull up on SDA/MISO, SCL/SCLK, SS	_	_	_	1	_	_	kOhm
Total Error Band <sup>7</sup>	_	_	±1.5	_	_	±1.5	%FSS <sup>8</sup>
Accuracy <sup>9</sup>	_	_	±0.25	_	_	±0.25	%FSS BFSL
Long term stability (1000 hr, 25°C [77°F])	_	_	±0.25	_	_	±0.25	%FSS
Output resolution	0.03	_ _	_ _	_ 12	_ _	_ _	%FSS bits

<sup>&</sup>lt;sup>1</sup>Sensors are either 3.3 Vdc or 5.0 Vdc based on the catalog listing selected.

<sup>&</sup>lt;sup>9</sup>Accuracy: The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the pressure range at 25°C [77°F]. Includes all errors due to pressure non-linearity, pressure hysteresis, and non-repeatability.

TABLE 6. SENSOR OUTPUT AT SIGNIFICANT PERCENTAGES (DIGITAL VERSIONS ONLY)								
% OUTPUT	DIGITAL COUNTS							
% 001P01	DECIMAL	HEX						
0	0	0x0000						
10	1638	0x0666						
50	8192	0x2000						
90	14746	0x399A						
100	16383	0x3FFF						

<sup>&</sup>lt;sup>2</sup>Ratiometricity of the sensor (the ability of the device output to scale to the supply voltage) is achieved within the specified operating voltage.

<sup>&</sup>lt;sup>3</sup>The sensor is not reverse polarity protected. Incorrect application of supply voltage or ground to the wrong pin may cause electrical failure.

<sup>&</sup>lt;sup>4</sup>Operating temperature range: The temperature range over which the sensor will produce an output proportional to pressure.

<sup>&</sup>lt;sup>5</sup>Compensated temperature range: The temperature range over which the sensor will produce an output proportional to pressure within the specified performance limits.


<sup>&</sup>lt;sup>6</sup>Temperature output option: Typical temperature output error over the compensated temperature range of 0°C to 50°C. Operation in Sleep Mode may affect temperature output error depending on duty cycle.

<sup>&</sup>lt;sup>7</sup>Total Error Band: The maximum deviation from the ideal transfer function over the entire compensated temperature and pressure range. Includes all errors due to offset, full scale span, pressure non-linearity, pressure hysteresis, repeatability, thermal effect on offset, thermal effect on span, and thermal hysteresis.

<sup>&</sup>lt;sup>8</sup>Full Scale Span (FSS): The algebraic difference between the output signal measured at the maximum (Pmax.) and minimum (Pmin.) limits of the pressure range. (See Figure 2.)


#### FIGURE 2. TRANSFER FUNCTION LIMITS<sup>1</sup>

#### **Analog Versions**

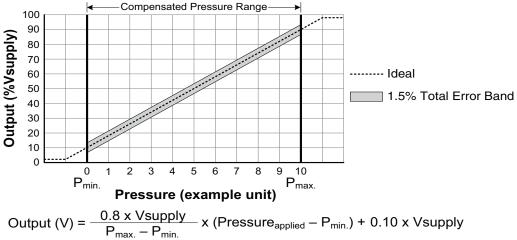

Output (V) = 
$$\frac{0.8 \text{ x Vsupply}}{P_{\text{max.}} - P_{\text{min.}}} \text{ x (Pressure}_{\text{applied}} - P_{\text{min.}}) + 0.10 \text{ x Vsupply}$$


#### **Digital Versions**

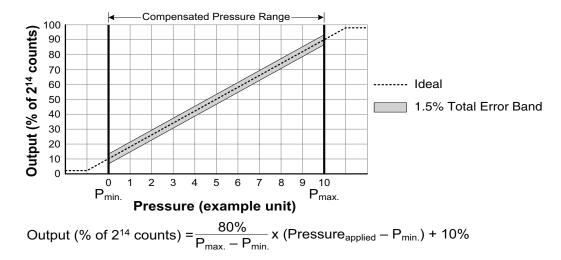

 $<sup>^1</sup>$ Transfer Function "A" is shown. See Figure 3 for other available transfer functions.

#### FIGURE 3. NOMENCLATURE AND ORDER GUIDE

For example, **ABPDNNN150PGAA3** defines an ABP Series Amplified Basic Pressure Sensor, DIP package, NN pressure port, dry gases only, no diagnostics, 150 psi gage pressure range, analog output type, 10% to 90% of Vsupply (analog), transfer function, no temperature output, no sleep mode, 3.3 Vdc supply voltage.

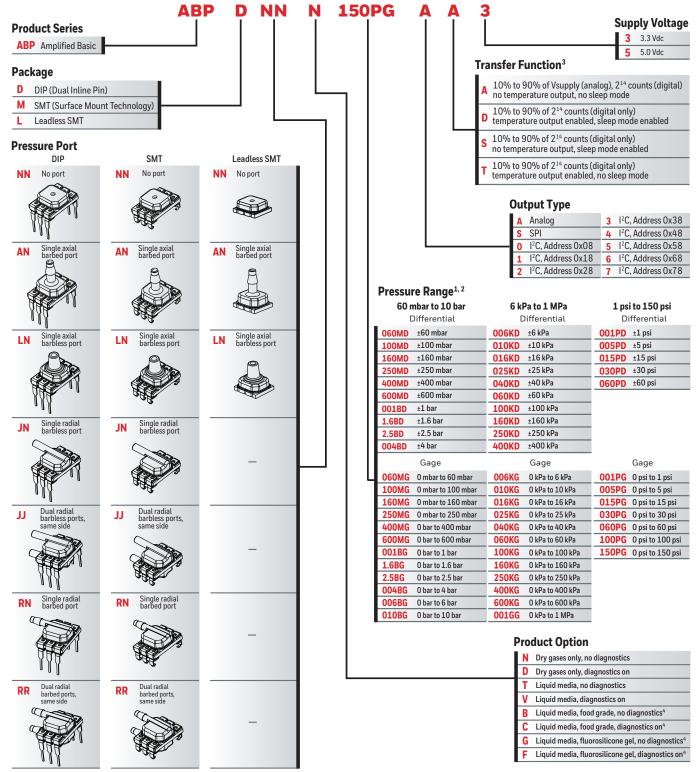

 $<sup>^{1}</sup>$  Custom pressure ranges are available. Contact Honeywell Customer Service for more information.

<sup>&</sup>lt;sup>2</sup> See the explanation of sensor pressure types in Table 4.

<sup>&</sup>lt;sup>3</sup> The Transfer Function limits define the output of the sensor at a given pressure input. By specifying P<sub>min.</sub> and P<sub>max</sub>, the output at P<sub>min.</sub> and P<sub>max</sub>, the complete transfer function of the sensor is defined. See the graphical representations of the transfer function in Figure 3.


<sup>&</sup>lt;sup>4</sup> Food grade and harsh media compatible product options are available. Contact Honeywell Customer Service for more information.

PRESSURE			E OVERPRESSURE <sup>1</sup>			BURST PE	RESSURE <sup>2</sup>	соммон
RANGE (SEE FIGURE 3.)	PMIN.	PMAX.	UNIT	PORT 1 (P1)	PORT 2 (P2)	PORT 1 (P1)	PORT 2 (P2)	MODE PRESSURE
(32211401123.)				1 psi to 1			, ,	
				Differe				
060MD	-60	60	mbar	2000	850	3500	1000	10000
.00MD	-100	100	mbar	4000	1400	7000	2500	10000
L60MD	-160	160	mbar	4000	1400	7000	2500	10000
250MD	-250	250	mbar	4000	1400	7000	2500	10000
400MD	-400	400	mbar	6000	2000	19000	4000	10000
500MD	-600	600	mbar	6000	2000	19000	4000	10000
001BD	-1	1	bar	17	4	19	8	17
1.6BD	-1.6	1.6	bar	17	8	19	16	17
2.5BD	-2.5	2.5	bar	17	8	19	16	17
004BD	-4.0	4.0	bar	17	16	19	19	17
70.00		1.0	541	Gag		10	10	
060MG	0	60	mbar	2000		3500	_	5500
100MG	0	100	mbar	2000	_	3500	_	10000
160MG	0	160	mbar	2000	_	3500	_	10000
250MG	0	250	mbar	4000	_	7000	_	10000
400MG	0	400	mbar	6000		19000	_	10000
600MG	0	600		6000	_	19000	_	10000
			mbar				_	
001BG	0	1	bar	17	_	19	_	17
1.6BG	0	1.6	bar	17	_	19	_	17
2.5BG	0	2.5	bar	17	_	19	_	17
004BG	0	4	bar	17	_	19	_	17
D06BG	0	6	bar	17	_	19	_	17
010BG	0	10	bar	17	_	19	_	17
				6 kPa to 1				
	_	_		Differe				
006KD	-6	6	kPa	200	85	350	100	1000
D10KD	-10	10	kPa	400	140	700	250	1000
D16KD	-16	16	kPa	400	140	700	250	1000
025KD	-25	25	kPa	400	140	700	250	1000
040KD	-40	40	kPa	600	200	1900	400	1000
060KD	-60	60	kPa	600	200	1900	400	1000
100KD	-100	100	kPa	1700	400	1900	800	1700
160KD	-160	160	kPa	1700	800	1900	1600	1700
250KD	-250	250	kPa	1700	800	1900	1600	1700
400KD	-400	400	kPa	1700	1600	1900	1900	1700
				Gag	е			
DO6KG	0	6	kPa	200	_	350	_	550
D10KG	0	10	kPa	200	_	350	_	1000
016KG	0	16	kPa	200	_	350	_	1000
D25KG	0	25	kPa	400	_	700	_	1000
040KG	0	40	kPa	600	_	1900	_	1000
D60KG	0	60	kPa	600	_	1900	_	1000
100KG	0	100	kPa	1700	_	1900	_	1700
160KG	0	160	kPa	1700	_	1900	_	1700
250KG	0	250	kPa	1700	_	1900	_	1700
400KG	0	400	kPa	1700	_	1900	_	1700
600KG	0	600	kPa	1700	_	1900	_	1700
001GG	0	1	МРа	1.7	_	1.9		1.7

TABLE 7. PRESSURE RANGE SPECIFICATIONS (CONTINUED)								
PRESSURE	PRESSUR	PRESSURE RANGE		OVERPR	ESSURE <sup>1</sup>	BURST PF	RESSURE <sup>2</sup>	соммон
RANGE (SEE FIGURE 3.)	PMIN.	PMAX.	UNIT	Port 1 (P1)	Port 2 (P2)	Port 1 (P1)	Port 2 (P2)	MODE PRESSURE <sup>3</sup>
1 psi to 150 psi								
				Differe	ntial			
001PD	-1	1	psi	30	10	50	15	150
005PD	-5	5	psi	90	30	275	40	150
015PD	-15	15	psi	250	60	275	120	250
030PD	-30	30	psi	250	120	275	240	250
060PD	-60	60	psi	250	250	275	275	250
				Gag	е			
001PG	0	1	psi	30	_	50	_	150
005PG	0	5	psi	90	_	275	_	150
015PG	0	15	psi	250	_	275	_	250
030PG	0	30	psi	250	_	275	_	250
060PG	0	60	psi	250	_	275	_	250
100PG	0	100	psi	250	_	275	_	250
150PG	0	150	psi	250	_	275	_	250

<sup>&</sup>lt;sup>1</sup>Overpressure: The maximum pressure which may safely be applied to the product for it to remain in specification once pressure is returned to the operating pressure range. Exposure to higher pressures may cause permanent damage to the product. Unless otherwise specified this applies to all available pressure ports at any temperature with the operating temperature range.

#### FIGURE 4. RECOMMENDED FILTER CAP




<sup>&</sup>lt;sup>2</sup>Burst pressure: The maximum pressure that may be applied to the specified port (P1 or P2) of the product without causing escape of pressure media. Product should not be expected to function after exposure to any pressure beyond the burst pressure.


<sup>&</sup>lt;sup>3</sup>Common mode pressure: The maximum pressure that can be applied simultaneously to both ports of a differential pressure sensor without causing changes in specified performance.

# FIGURE 5. DIP PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)

DIP NN: No port

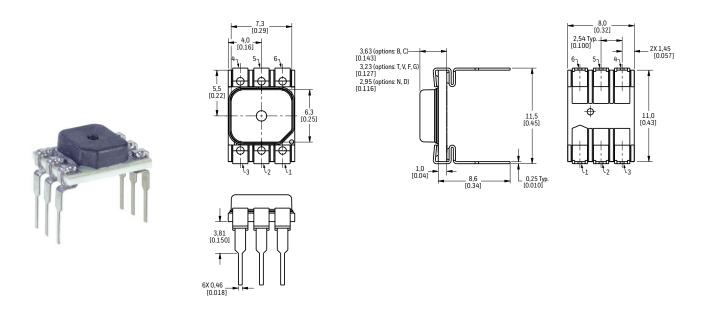


**DIP AN:** Single axial barbed port

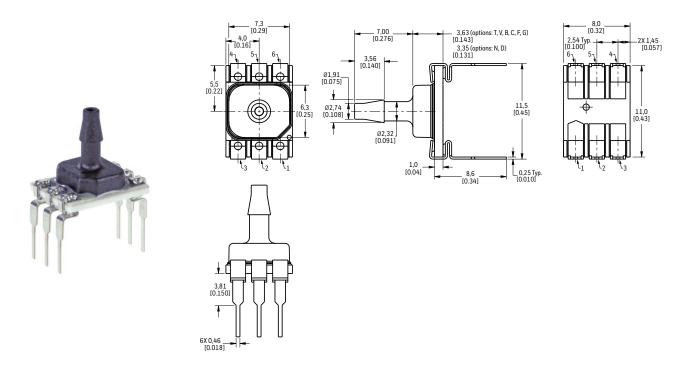


# FIGURE 5. DIP PACKAGE DIMENSIONAL DRAWINGS (CONTINUED)


**DIP LN:** Single axial barbless port

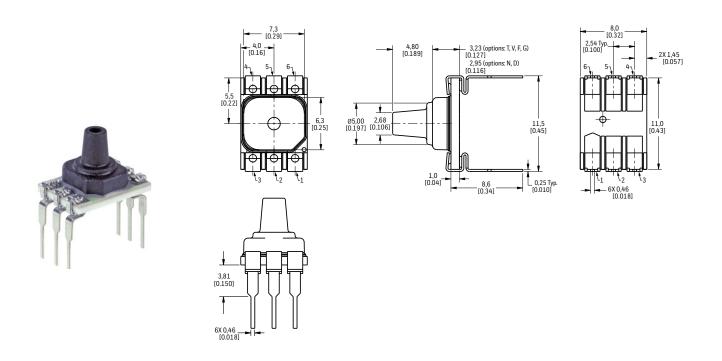

**DIP JN:** Single radial barbless port

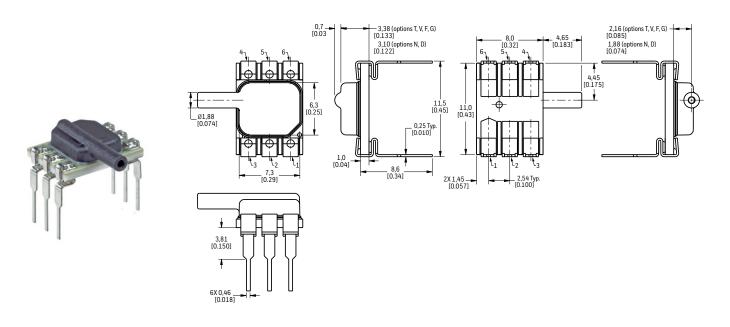



# FIGURE 5. DIP PACKAGE DIMENSIONAL DRAWINGS (CONTINUED)

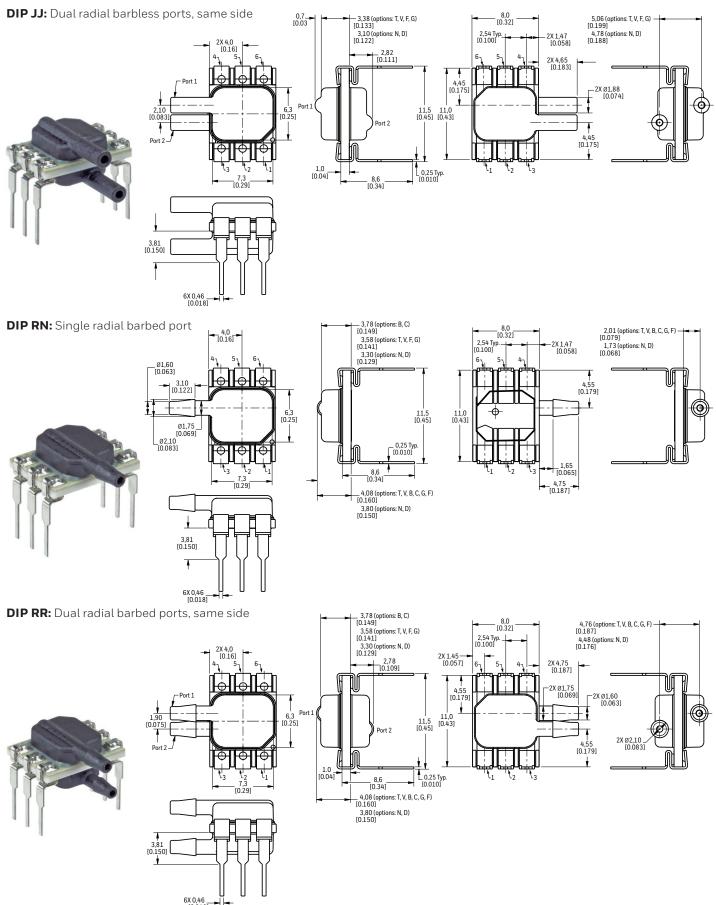


## FIGURE 6. SMT PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)

SMT NN: No port







SMT AN: Single axial barbed port

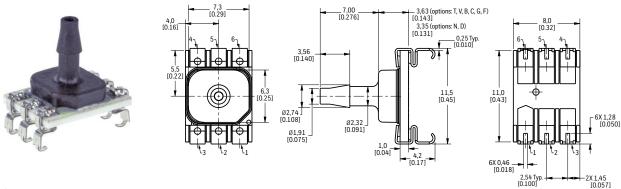


**SMT LN:** Single axial barbless port

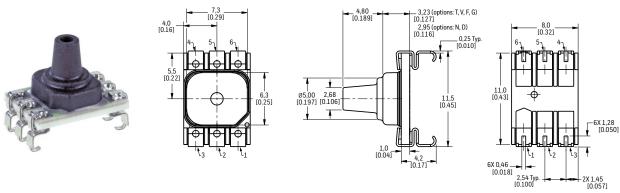


SMT JN: Single radial barbless port



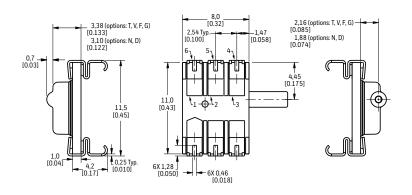


#### FIGURE 6. SMT PACKAGE DIMENSIONAL DRAWINGS (CONTINUED)


SMT JJ: Dual radial barbless ports, same side

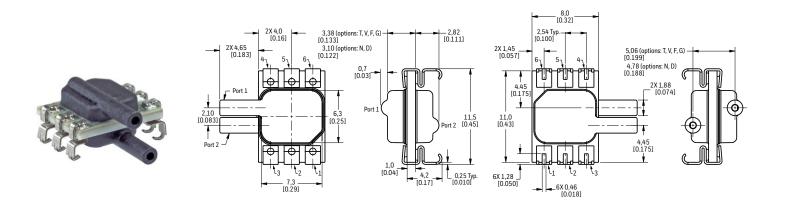

SMT RN: Single radial barbed port

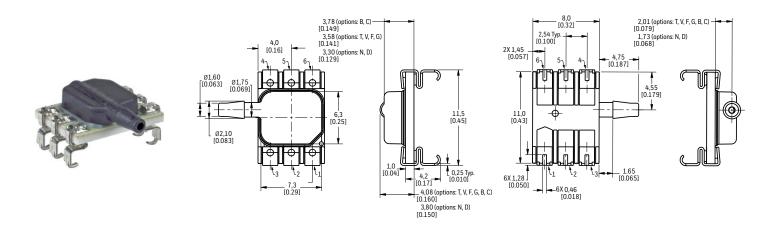


SMT RR: Dual radial barbed ports, both sides

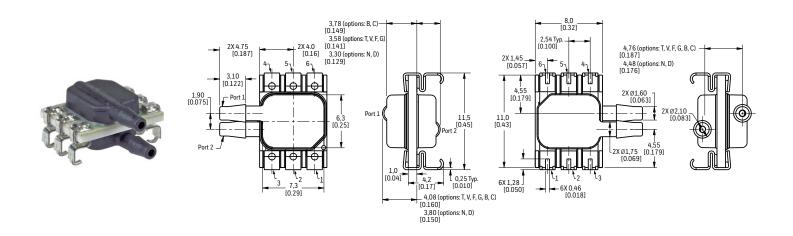


## FIGURE 7. LEADLESS SMT PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)

Leadless SMT NN: No port









Leadless SMT AN: Single axial barbed port









Leadless SMT LN: Single axial barbless port











TABLE 8. PINOUTS						
OUTPUT TYPE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6
I <sup>2</sup> C	GND	$V_{\text{supply}}$	INT	NC	SDA	SCL
SPI	GND	$V_{\text{supply}}$	SS	NC	MISO	SCLK
analog	GND	NC	$V_{out}$	NC	NC	$V_{\text{supply}}$


FIGURE 8. RECOMMENDED PCB LAYOUTS


DIP

**SMT** 

Leadless SMT







#### **ADDITIONAL MATERIALS**

The following associated literature is available at sensing.honeywell.com:

- Product range guide
- Installation instructions
- Application note

### FOR MORE INFORMATION

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit sensing.honeywell.com or call:

USA/Canada +1 302 613 4491 Latin America +1 305 805 8188 Europe +44 1344 238258

Japan +81 (0) 3-6730-7152

Singapore +65 6355 2828 Greater China +86 4006396841

#### WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

# **⚠ WARNING**PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

# **⚠ WARNING**MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only.
   Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

# Honeywell Sensing and Internet of Things

830 East Arapaho Road Richardson, TX 75081 sensing.honeywell.com



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Honeywell:

ABPDANT005PGAA5 ABPMANN004BGAA5 ABPDLNN100MG2A3 ABPLLNT010BGAA5 ABPDJJT001PGAA5 ABPMJJT015PGAA5 ABPDANT015PGAA5 ABPMLNN001PGAA3 ABPDRRT005PG2A5 ABPLLNN600MGAA3 ABPLLND060MGAA3 ABPDLNV150PGAA3 ABPDLNV150PGSD3 ABPLLNN150PGAA3 ABPLLNN150PGAA5 ABPMLNV006KG2A3 ABPMRNN060PG0D3 ABPLLNV010BGAA5 ABPDJJT006BDAA5 ABPMANN600MGAA3 ABPMLNV060PGAA3 ABPMLNV015PDAA3 ABPMLNV150PGAA3 ABPMJJT006KD1A3 ABPDLNN060PGAA3 ABPMANT100PG2A3 ABPDRRT015PG3D3 ABPDJJT005PDSA3 ABPLLNN400MG2A3 ABPMJJT250MDSA3 ABPDANT600MDAA5 ABPDANN030PGAA5 ABPLLNN250MGAA5 ABPMANN005PG2A3 ABPLANT005PG2A3 ABPDRRT060MDAA3 ABPLLNN060MGSA3 ABPDLNT150PGAA5 ABPLANT160MGAA5 ABPDANN2.5BGAA5 ABPLNNV100PG2T3 ABPLANT001PG2A5 ABPLANT015PD2A5 ABPDRRN400MGAA5 ABPMLNN600MGAA3 ABPDANN010KG2D3 ABPMRRT006KGAA5 ABPDANN040MG2A3 ABPDANT060PG2A3 ABPDJJN010KG2A3 ABPMJJT060KD2A3 ABPDNNT100PG2T3 ABPLANN1.6BG2A3 ABPDANT060MGAA5 ABPDRNT030PG2D3 ABPDNNT100PG2A3 ABPLNNN060MGSA3 ABPLLND600MG0S3 ABPDLNN150PGAA5 ABPMRNN060MG2A3 ABPMRNN001BGAA3 ABPDANN010BGAA5 ABPDRRT005PG2D3 ABPDANT060MGSA5 ABPDANN001PGAA5 ABPMANN001PG2A3 ABPMLNN250MGAA5 ABPDANN060PGAA5 ABPMANN030PGAA3 ABPDANT010BG2A3 ABPMJNN060KGAA5 ABPMRRT001PGAA5 ABPMRNN001PD2S5 ABPDJJT001PDSA3 ABPMLNN030PGAA5 ABPMJJT250MDAA3 ABPDLNN030PGAA5 ABPMRRT006KDSD3 ABPDANT600MGAA3 ABPMJJT250KD3A3 ABPMRRN005PD2A3 ABPMRRT006KGSA5 ABPDANN010BG2A3 ABPMJNN060MG2A3 ABPDRRT060MGAA3 ABPMANT030PG2A3 ABPMRRT600MGAA3 ABPDANN010KGAA5 ABPMRRN400MGAA5 ABPLLNT060MGSA3 ABPDRRT015PG2D3 ABPMRRN060MGAA5 ABPDANT030PG0D3 ABPLLNV010BGBAA5 ABPMLNV006KG2T3 ABPMANV015PG7A5 ABPLNNN030PG2A3 ABPLLNN150PGST5 ABPLLNN015PGST5 ABPMRNN060PGAA3