

ASG Ø86mm Rotating/Flashing/Strobe Beacons with Buzzer

SIGNAL LIGHTS



- Incandescent or Xenon type
- Red, Yellow, Green and Blue lens available
- Smooth lens
- Stud mounted
- Optional Wall Mounting Brackets available
- Wide range of power supply

Order Information

ASG **B** - **01** - **R**

Lens Colors	
R	Red
Y	Yellow
G	Green
B	Blue

Power Supply	
01	DC 12V
02	DC 24V
FF	AC 110/220V
10	AC 110V
20	AC 220V

Light Style	
	Rotating Light
B	Rotating Light with Buzzer
F	Flashing Light
S	Strobe Light with Xenon Bulb

Flashing & Strobe Lights


★ Refer to Specifications for Power Supply

AC 110 or 220V Only ▶

Specifications

Model	ASG/ASGB	ASGF	ASGS
Bulb Type	Incandescent		Xenon
★ Power Supply	12VDC, 24VDC, 110/220VAC	12VDC, 24VDC, 110VAC, 220VAC	110VAC, 220VAC
Current Draw & Wattage	12VDC	0.7A, 8W	—
	24VDC	0.3A, 8W	—
	110/220VAC	0.03A, 5W	—
	110VAC	—	0.22A, 6W
	220VAC	—	0.11A, 6W
Sound Level	80 dB	—	—
Rotation Rate	130 times/minute	—	—
Flashing rate	—	80 times/minute	—

Dimensions

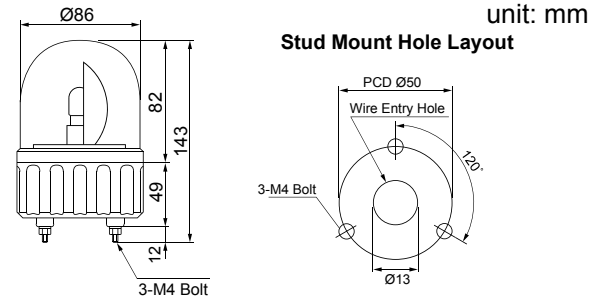

Optional Orders

Replacement Parts

Bulb	MAB-T15-S-012-08	12V DC, 8 Watt
	MAB-T15-S-024-08	24V DC, 8 Watt
	MAB-T15-S-012-05	110/220V AC, 5 Watt
Xenon Bulb	MAB-STROBE-110-06	110/220V AC, 6 Watt
Lens	LENS-ASG-(□)	Smooth Lens for Rotating Lights
	LENS-ASGF-(□)	Smooth Lens for Flashing/Strobe Lights

(□): indicates color of Lens; R, Y, G or B

Wall Mount Brackets



MAP-DS30-BLK (Black)
MAP-DS30-BGE (Beige)




MAM-DS26

NOTE: See Page 14 for Dimensions.

Wiring Diagram


DC Rotating Lights

ASG-01-□ ASGB-01-□
ASG-02-□ ASGB-02-□

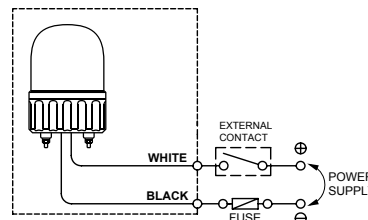

DC & AC Flashing Lights

ASGF-01-□ ASGF-10-□
ASGF-02-□ ASGF-20-□

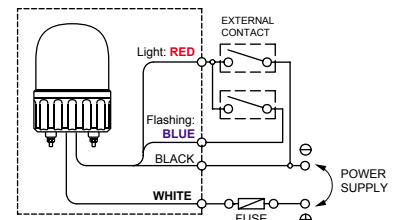

AC Rotating & Strobe Lights

ASG-FF-□ ASGS-10-□
ASGB-FF-□ ASGS-20-□

